




VOORAANZICHT - VUE FRONTALE
VORDERANSICHT - FRONT VIEW

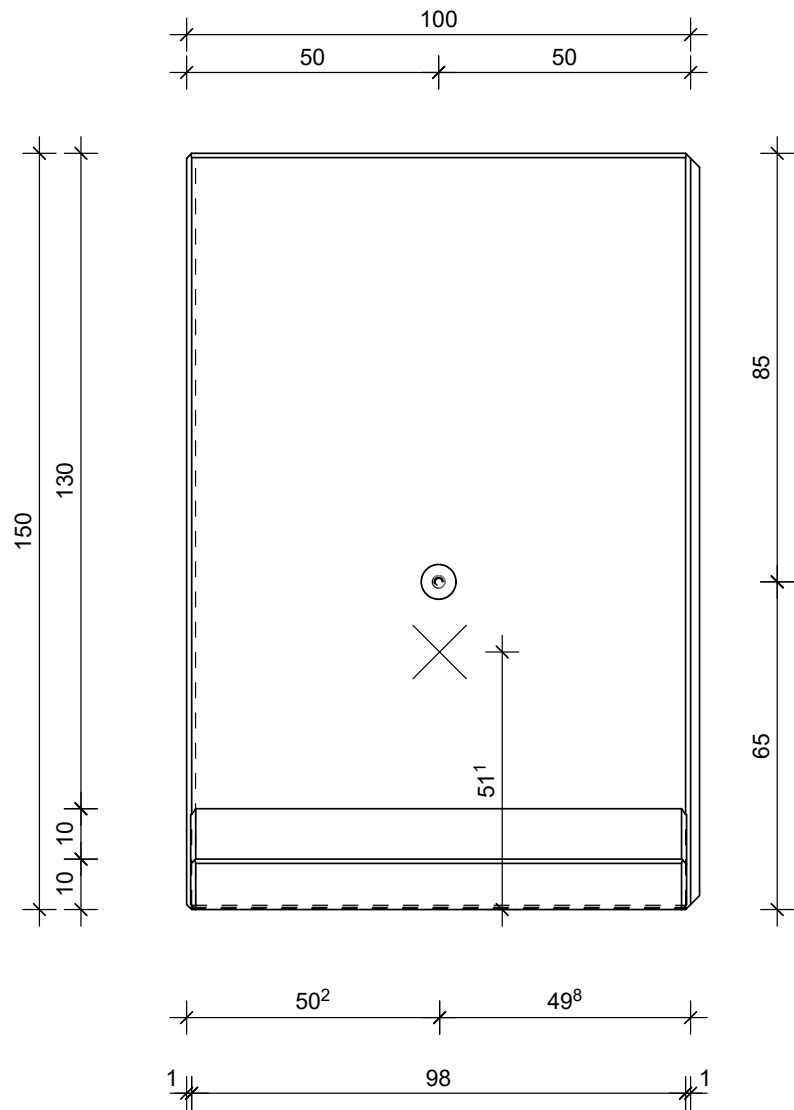


BOVENAANZICHT - VUE SUPERIEURE
DRAUFSICHT - TOP VIEW

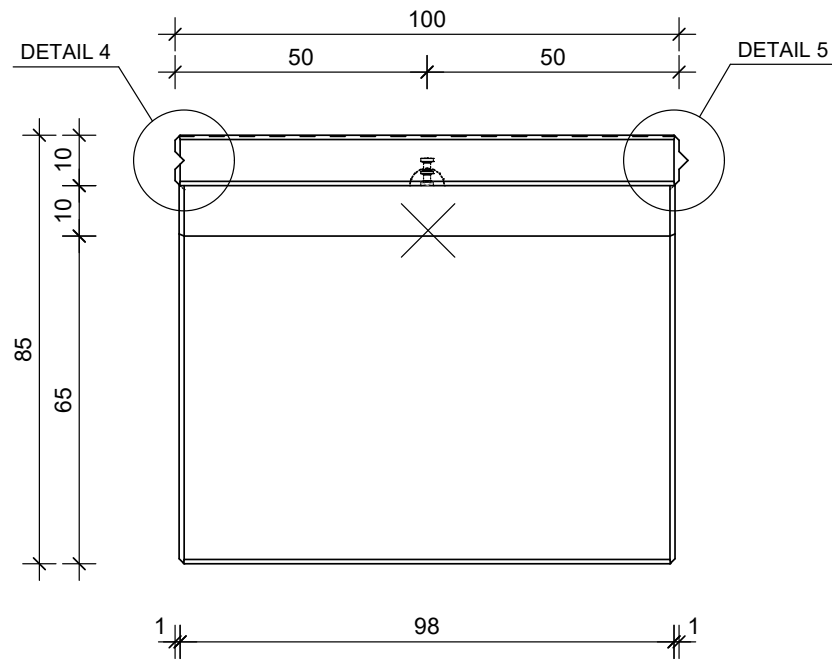

DOORSNEDE - COUPE TRANSVERSALE
QUERSCHNITT - CROSS SECTION

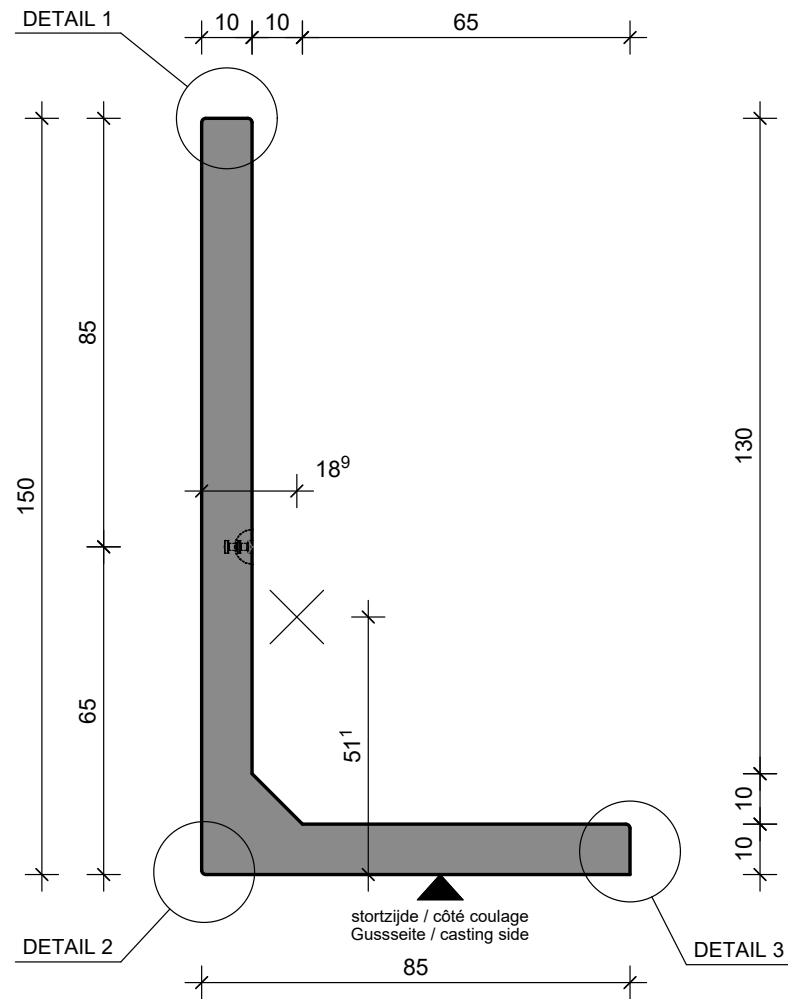


HIJSVOORSCHRIFTEN - INSTRUCTION DE LEVAGE
HEBEANLEITUNG - LIFTING INSTRUCTIONS

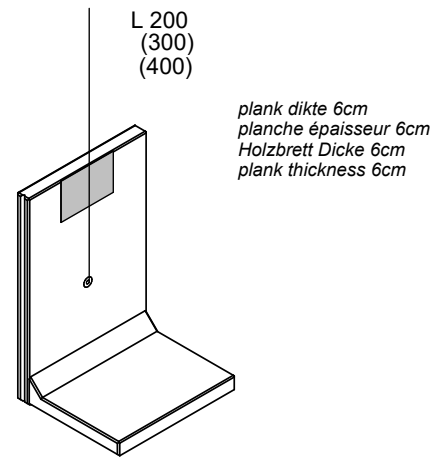


L (cm) minimale kettinglengte / longueur minimale des chaînes
minimale Kettenlänge / minimum chain length


DETAIL 1




DETAIL 2




DETAIL 3




DETAIL 4



DETAIL 5



132 BENOR 437



TECHNISCHE FICHE / FICHE TECHNIQUE
TECHNISCHE DATEN / TECHNICAL DATA

CLF10GS 150x100

sterkteklasse / classe de résistance Festigkeitsklasse / strength class	C60/75
constructieklasse / classe structurale Bauklasse / structural class	S1
betondekking / enrobage de béton Betondeckung / concrete cover	30mm
milieuklasse / classe d'exposition Expositionsklasse / exposure class (EN 206)	B / NL: XC4, XD3, XS3, XF4* F / UK: XC4, XD1, XS1, XF3* D: XC4, XF3*
omgevingsklasse / classe d'environnement Umgebungsclass / environmental class (NBN B15-001)	EE4/ES4*
staalkwaliteit / qualité de l'acier Stahlqualität / steel quality	B500B*
toelaatbare maatfout / écart dimensionnel admissible zulässige Maßabweichung / allowable dimensional deviation	+5mm/-5mm
stortzijde / côté coulage Gussseite / casting side	afgestreken / tiré à la règle abgestrichen / levelled
betonafmetingen / dimensions de béton Betonabmessungen / concrete dimensions	cm
andere afmetingen / autres dimensions andere Abmessungen / other dimensions	mm

artikelnr. / numéro d'article Artikelnr. / item number	12000
versie / version Version / version	20210607
productie / production Herstellung / production	Wielsbeke
volume / volume Volumen / volume	0.2282 m³
gewicht / poids Gewicht / weight	555 kg
ankers / ancrs Anker / anchors	KKA: 1x 2.5T-55mm
hijshaken / anneaux de levage Kupplungen / lifting links	1x HEFH KKA 2.5

