




VOORAANZICHT - VUE FRONTALE
VORDERANSICHT - FRONT VIEW

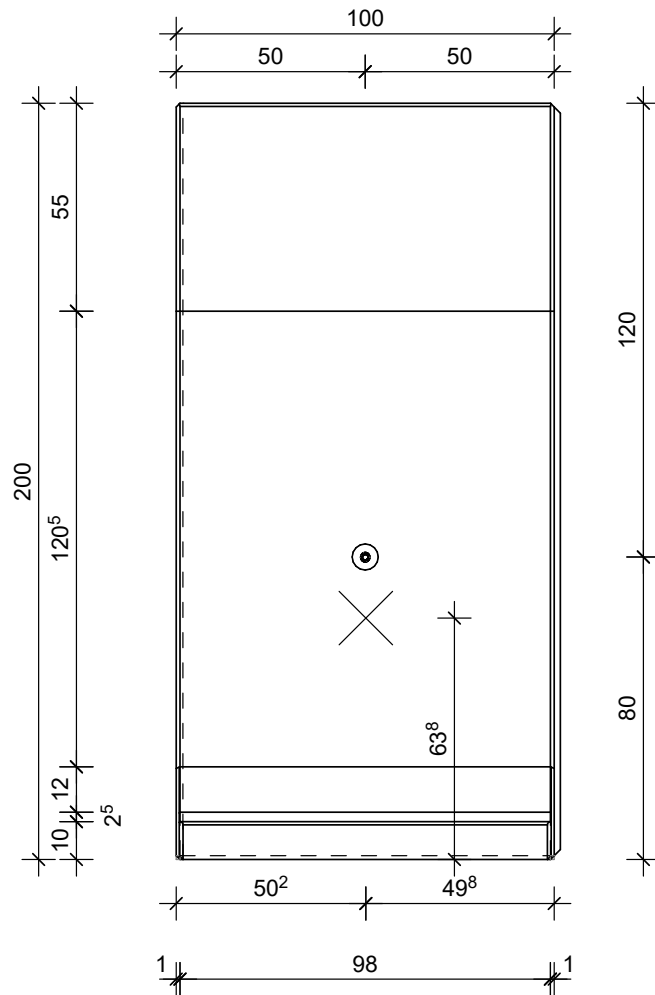


BOVENAANZICHT - VUE SUPERIEURE
DRAUFSICHT - TOP VIEW

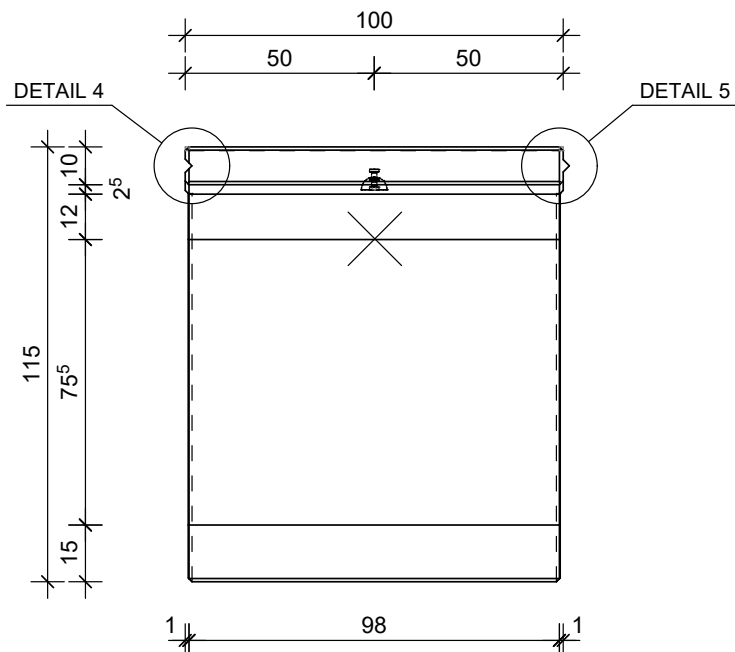



DOORSNEDE - COUPE TRANSVERSALE
QUERSCHNITT - CROSS SECTION

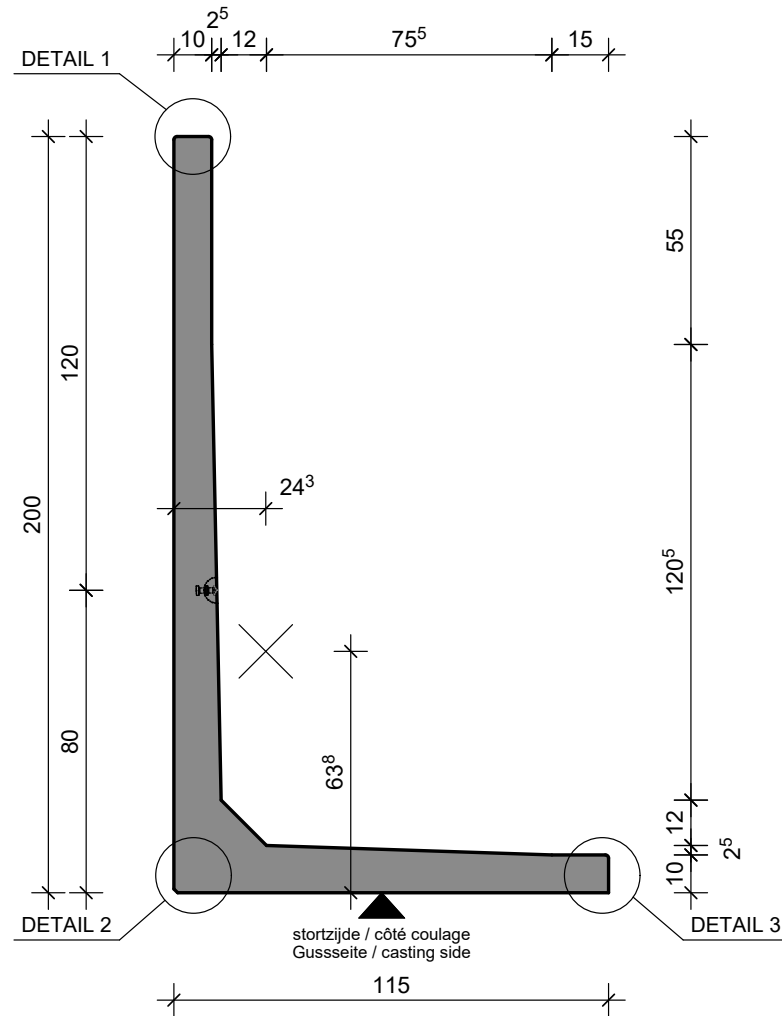

HIJSVOORSCHRIFTEN - INSTRUCTION DE LEVAGE
HEBEANLEITUNG - LIFTING INSTRUCTIONS

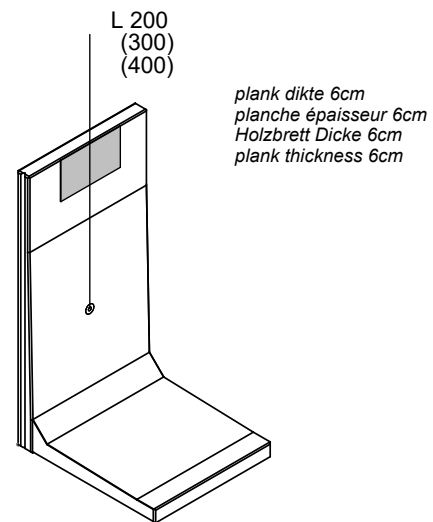

L (cm) *minimale kettinglengte / longueur minimale des chaînes*
minimale Kettenlänge / minimum chain length

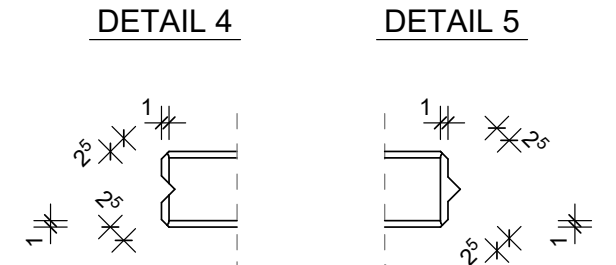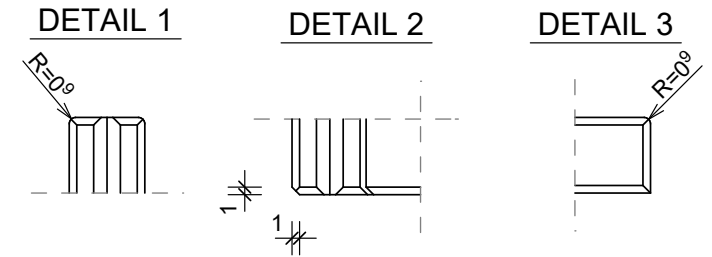

TECHNISCHE FICHE / FICHE TECHNIQUE
TECHNISCHE DATEN / TECHNICAL DATA

element / élément / Element / element

CLF10GS 200x100

sterkteklasse / classe de résistance Festigkeitsklasse / strength class	C60/75
constructieklasse / classe structurale Bauklasse / structural class	S1
betondekking / enrobage de béton Betondeckung / concrete cover	30mm
milieuklasse / classe d'exposition Expositionsklasse / exposure class (EN 206)	B / NL: XC4, XD3, XS3, XF4* F / UK: XC4, XD1, XS1, XF3* D: XC4, XF3*
omgevingsklasse / classe d'environnement Umgebungsklasse / environmental class (NB1 B15-001)	EE4/ES4*
staalkwaliteit / qualité de l'acier Stahlgüte / steel quality	B500B*
toelaatbare maatafwijking / écart dimensionnel admissible zulässige Maßabweichung / allowable dimensional deviation	+5mm/-5mm
stortzijde / côté coulage Gussseite / casting side	afgestreken / tiré à la règle abgestrichen / levelled
betonafmetingen / dimensions de béton Betonabmessungen / concrete dimensions	cm
andere afmetingen / autres dimensions andere Abmessungen / other dimensions	mm

artikelnr. / numéro d'article Artikelnr. / item number	12003
versie / version Version / version	20210607
productie / production Herstellung / production	Wielsbeke
volume / volume Volumen / volume	0.3405 m³
gewicht / poids Gewicht / weight	830 kg
ankers / ancres Anker / anchors	KKA: 1x 2.5T-55mm
hysjaken / anneaux de levage Kupplungen / lifting links	1x HEFH KKA 2.5

* andere klassen op aanvraag / autres classes sur demande / other classes on request / andere Klassen auf Anfrage

