




VORDERANSICHT - FRONT VIEW

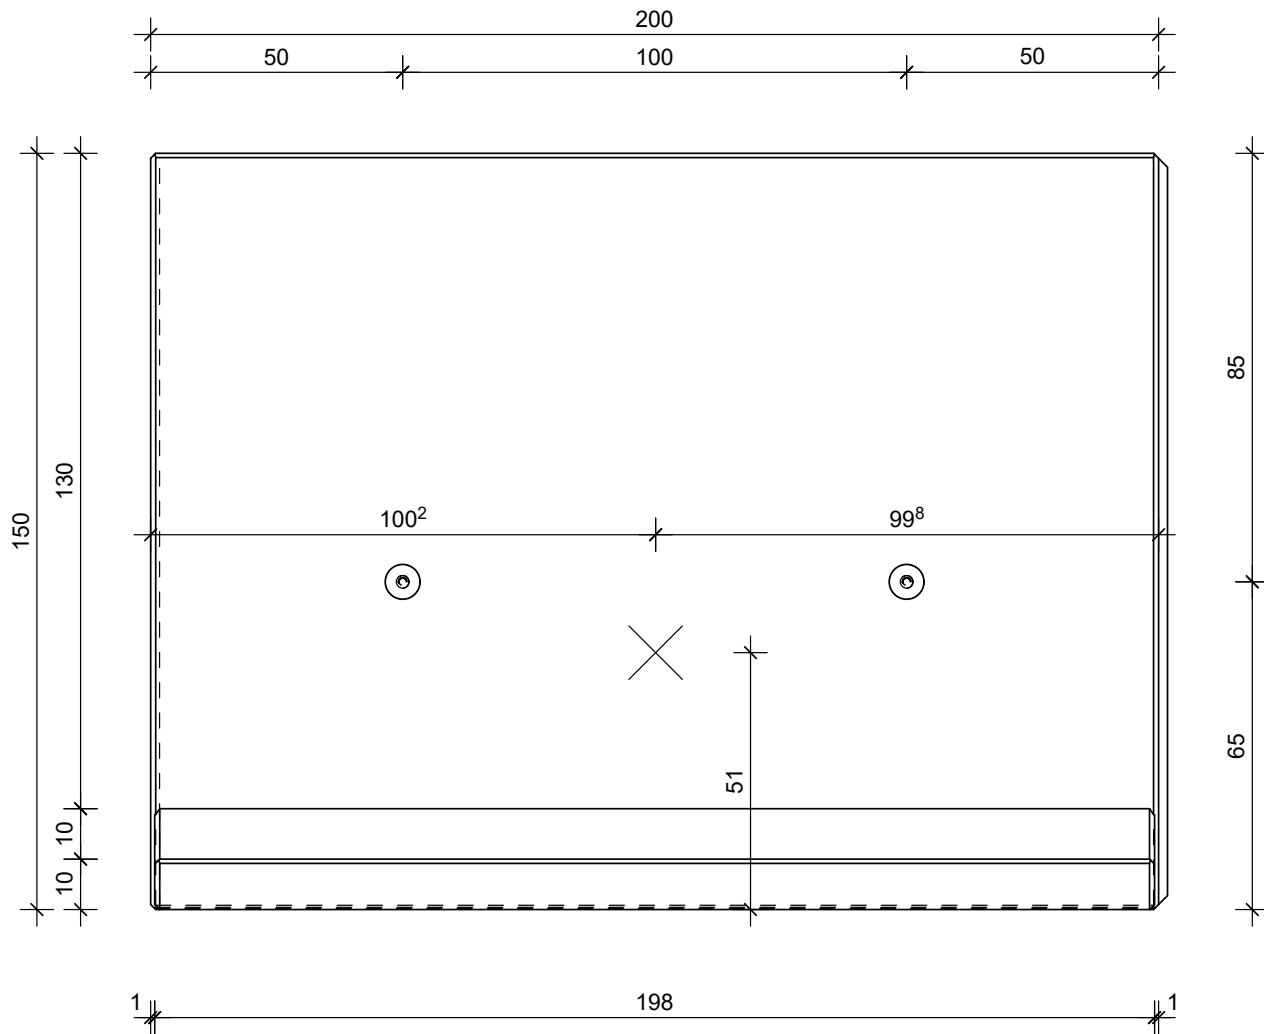


DRAUFSICHT - TOP VIEW

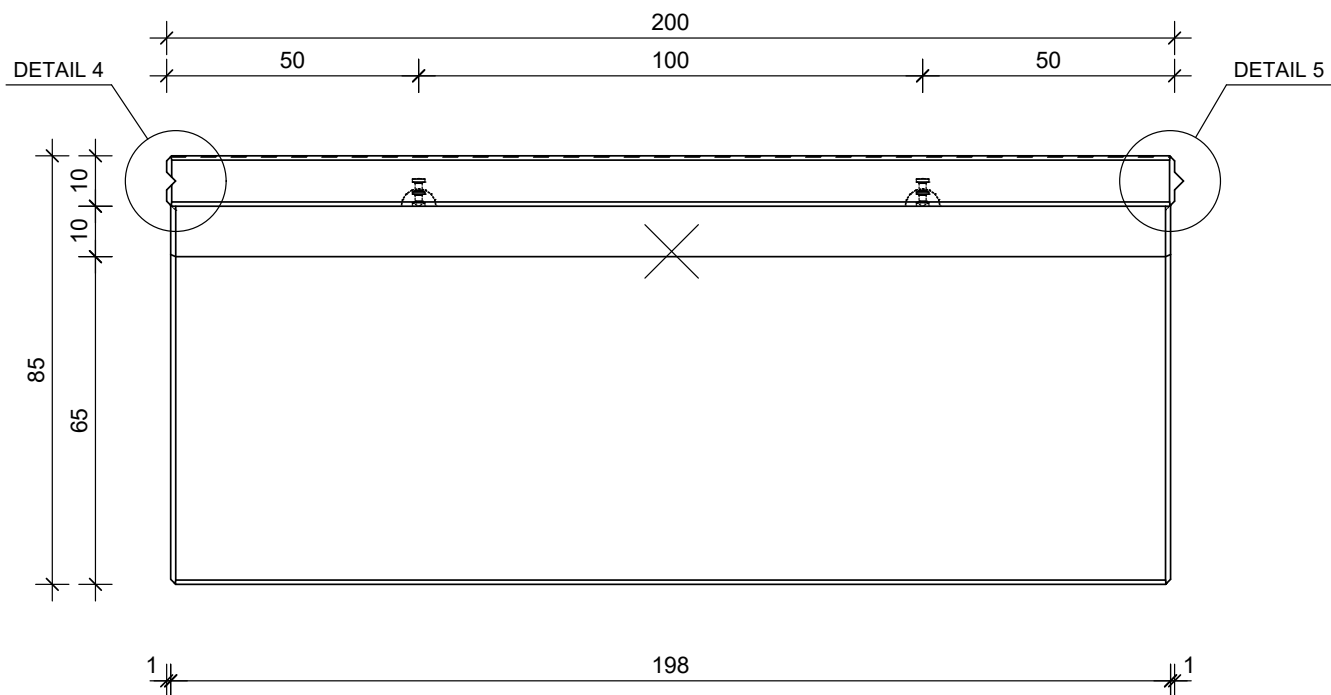

QUERSCHNITT - CROSS SECTION

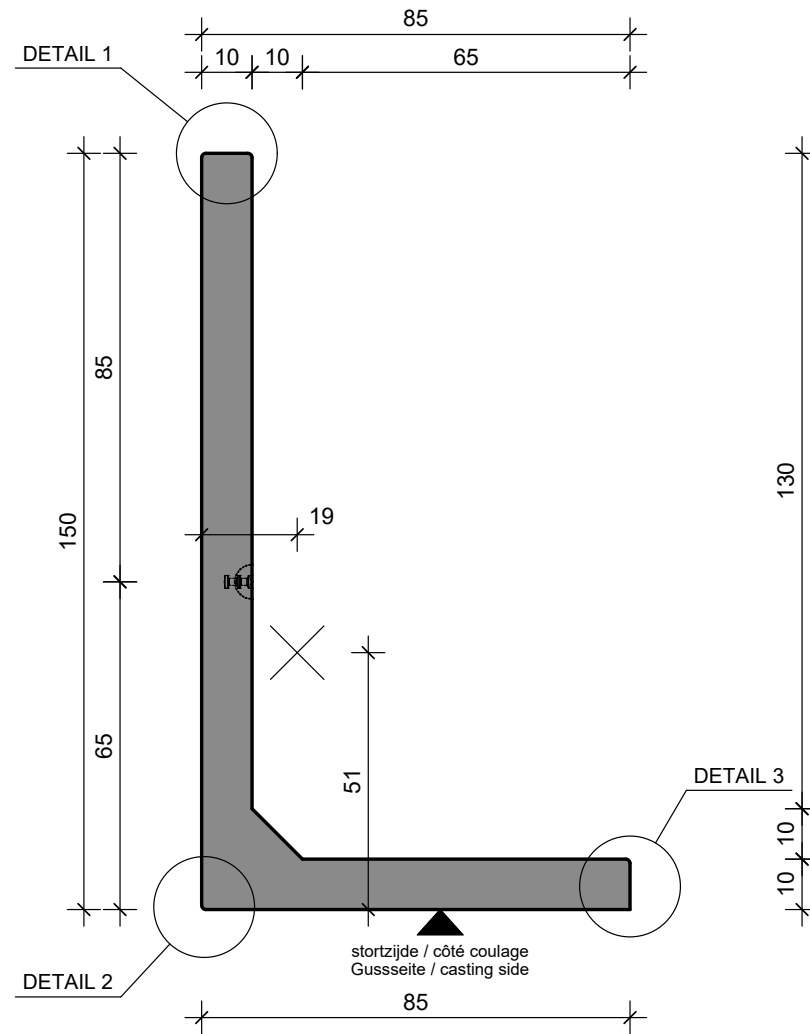


HEBEANLEITUNG - LIFTING INSTRUCTIONS

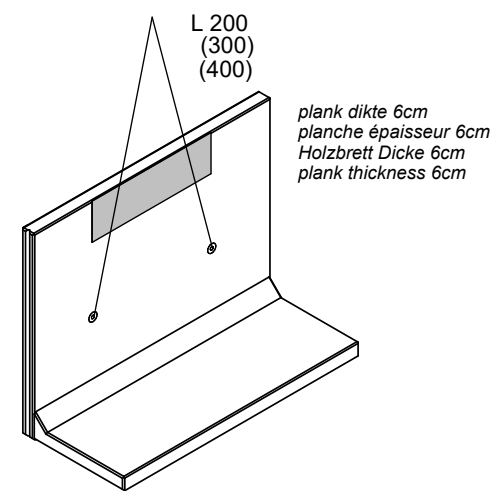

L (cm) *minimale kettinglengte / longueur minimale des chaînes*
minimale Kettenlänge / minimum chain length

DETAIL 1 DETAIL 2 DETAIL 3

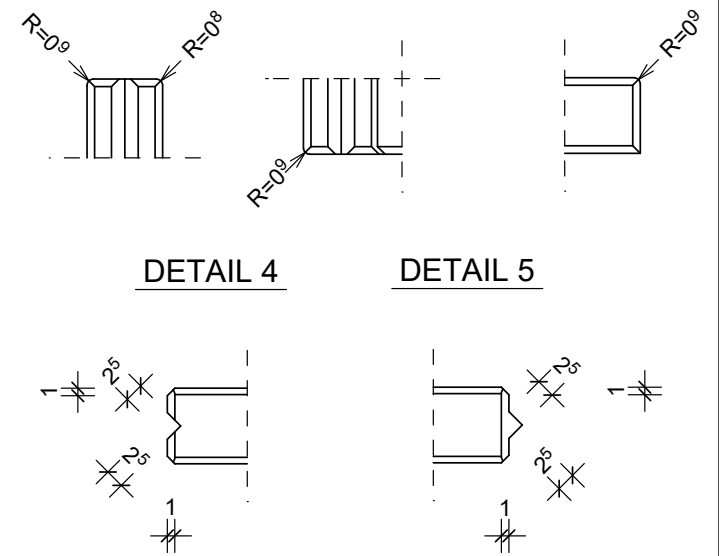

TECHNISCHE DATEN / TECHNICAL DATA

element / élément / Element / element

CLF10GS 150x200

sterkteklasse / classe de résistance Festigkeitsklasse / strength class	C60/75	artikelnr. / numéro d'article Artikelnr. / item number	11533
constructieklasse/ classe structurelle Bauklasse / structural class	S1	versie / version Version / version	20210607
betondekking / enrobage de béton Betondecking / concrete cover	30mm	productie / production Herstellung / production	Wielsbeke
milieuklasse / classe d'exposition Expositionsklasse / exposure class (EN 206)	B / NL: XC4, XD3, XS3, XF4* F / UK: XC4, XD1, XS1, XF3* D: XC4, XF3*	volume / volume Volumen / volume	0.4581 m³
omgevingsklasse / classe d'environnement Umgebungsklasse / environmental class (ENB B15-001)	EE4/ES4*	gewicht / poids Gewicht / weight	1115 kg
staalqualiteit / qualité de l'acier Stahlgüte / steel quality	B500B*	ankers / ancres Anker / anchors	
toelaatbare maatafwijking / écart dimensionnel admissible zulässige Maßabweichung / allowable dimensional deviation	+5mm/-5mm		KKA: 2x 2.5T-55mm
stortzijde / côté coulage Gusseite / casting side		hįszhaken / anneaux de levage Kupplungen / lifting links	2x HEFH KKA 2.5
betonafmetingen / dimensions de béton Betonabmessungen / concrete dimensions	cm		
andere afmetingen / autres dimensions andere Abmessungen / other dimensions	mm		

* andere klassen op aanvraag / autres classes sur demande / other classes on request / andere Klassen auf Anfrage

